

Version with attached flanges or loose flanges

Pressure rating:
6 / 10 / 16 bar
higher pressures on request

Body:
1.4404 / 1.4571 / 1.4435
on demand with APZ DIN 10204-3.1


Connecting flanges DIN 2576 PN 10:
1.4404 / 1.4571 / 1.4435

Cover flanges:
1.4301

Bolts:
DIN 912 A2-70

Sightglass discs:
borosilicate glass DIN 7081 (up to 243°C)

Seals (FDA compliant):
EPDM, Reinz AFM 34, PTFE
others on request

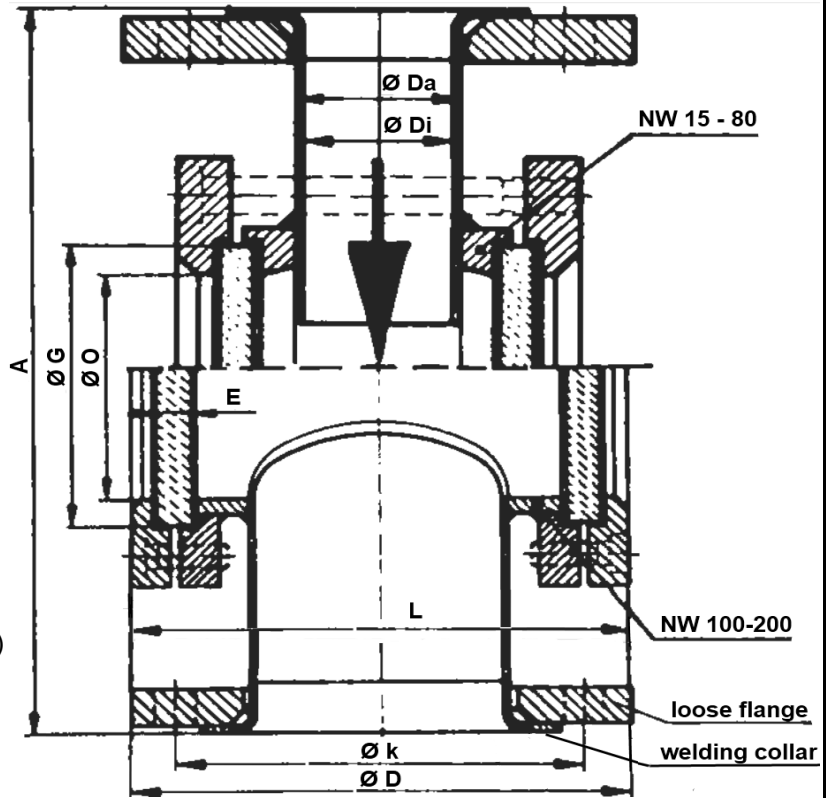

Ordering example:
5 Sight Flow Indicators Type KL 123 DN 50 with loos flanges
Body material: 1.4404
Cover Flanges and connecting flanges: 1.4301
Seals: EPDM

Flanges DIN 2576			Mounting Size				Glass Discs			View Ø O	Bolts		
NW	Ø D	Ø k	Ø Da	Ø Di	L	A	Ø G	PN 6 E	PN 10 E		PN 16 E	No.	Size
15	95	65	21,3	18,1	80	200	63	8	10	10	45	4	M10
20	105	75	26,9	23,7	90	200	63	8	10	10	45	4	M10
25	115	85	33,7	29,7	100	230	80	10	10	12	60	4	M12
32	140	100	42,4	38,4	110	230	80	10	10	12	60	4	M12
40	150	110	48,3	44,3	120	230	80	10	10	12	60	4	M12
50	165	125	60,3	55,1	130	240	100	10	12	15	80	4	M12
65	185	145	76,1	70,9	150	290	100	10	12	15	80	4	M12
80	200	160	88,9	83,7	170	310	125	15	15	20	100	4	M12
100	220	180	114,3	107,9	230	350	150	15	20	25	125	8	M12
125	250	210	139,7	133,3	260	400	175	20	20	25	150	8	M12
150	285	240	168,3	161,9	310	480	200	20	25	30	170	8	M16
200	340	295	219,1	212,7	370	600	250	25	30	-	225	8	M16



Manfred Kessler GmbH
Schauglasarmaturen
Grienmatt 44
D-79650 Schopfheim

Tel.: +49 (0) 7622 62343
Fax: +49 (0) 7622 7197
E-mail: info@kessler-sightglass.com
www.kessler-sightglass.com